



## EXHIBIT B

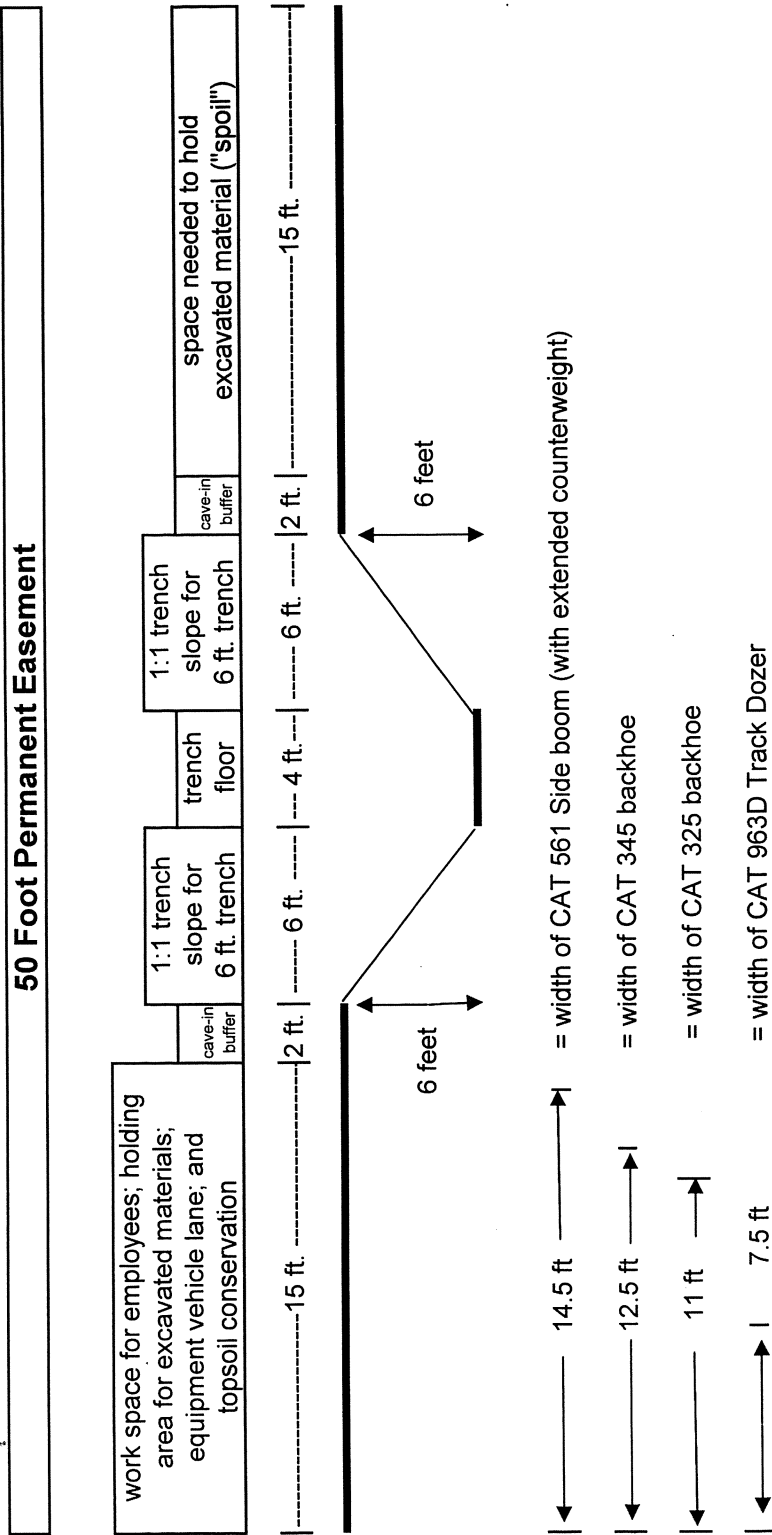

## Dimensions

All dimensions are subject to change without notice.

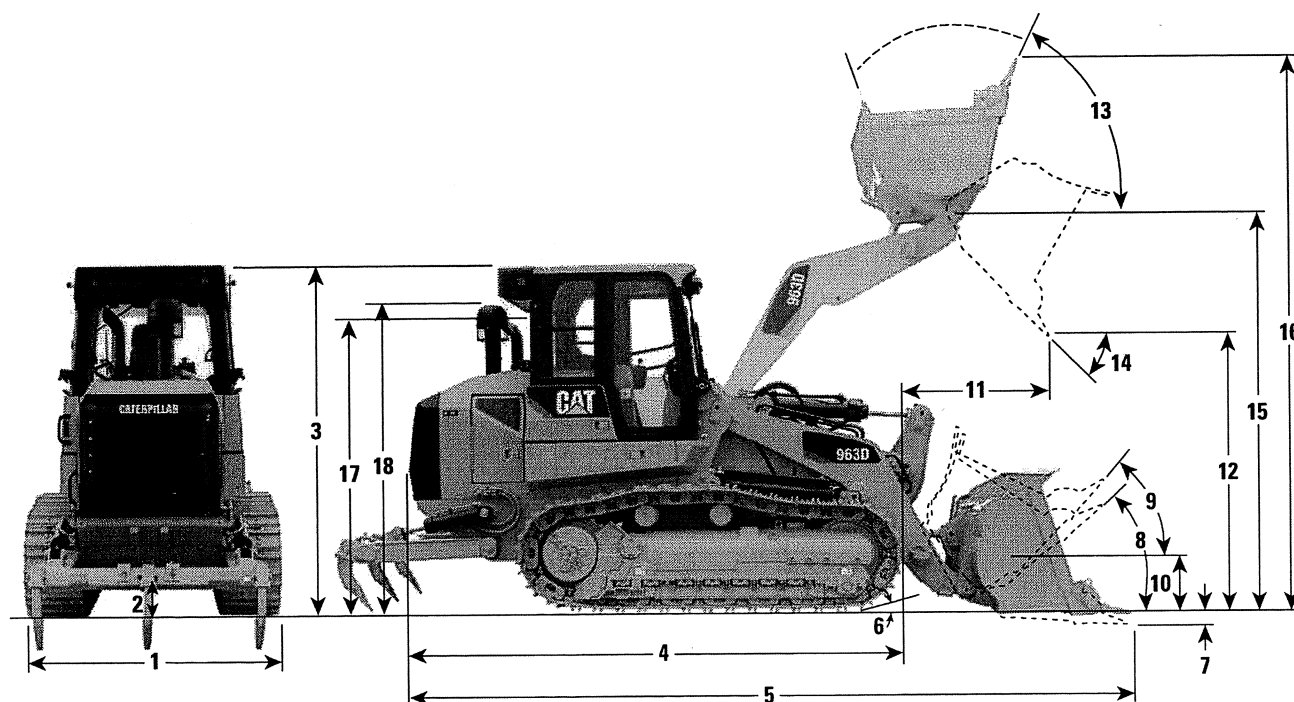


<b>1</b>	Overall machine width without bucket:	
	with standard tracks – 550 mm (21.6 in) shoes	2280 mm (89.7 in)
	with narrow tracks – 450 mm (17.7 in) shoes	2180 mm (85.8 in)
<b>2</b>	Ground clearance	471 mm (18.5 in)
<b>3</b>	Machine height to top of cab	3335 mm (131.3 in)
<b>4</b>	Length to front of track	4749 mm (187 in)
<b>5</b>	Overall machine length*	6941 mm (273.3 in)
<b>6</b>	Carry position approach angle	15°
<b>7</b>	Digging depth*	138 mm (5.4 in)
<b>8</b>	Maximum rollback at ground	43°
<b>9</b>	Maximum rollback at carry position	50°
<b>10</b>	Bucket height in carry position	457 mm (18 in)
<b>11</b>	Reach at full lift height and 45° dump*	1373 mm (54 in)
<b>12</b>	Clearance at full lift height and 45° dump*	2915 mm (114.8 in)
<b>13</b>	Maximum rollback, fully raised	52°
<b>14</b>	Maximum dump, fully raised	53°
	Grading angle	63°
<b>15</b>	Height to bucket hinge pin	3940 mm (155.1 in)
<b>16</b>	Overall machine height, bucket fully raised	5402 mm (212.7 in)
<b>17</b>	Height to top of seat with headrest	2790 mm (109.8 in)
<b>18</b>	Height to top of stack	2953 mm (116.3 in)

\* With general purpose bucket and extra duty teeth.

Dimensions vary with bucket. Refer to Operating Specifications chart.

## Dimensions

All dimensions are approximate.

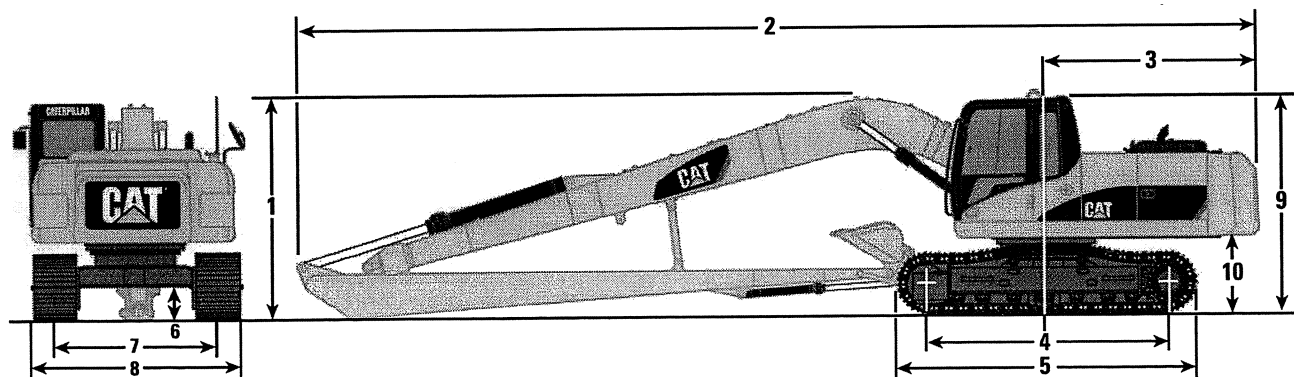

### Boom Options

### Super Long Reach Boom 10.2 m (33'6")

### Stick Options


### 7.85 m (25'9")

1	Shipping height	3230 mm (10'7")
2	Shipping length	14 380 mm (47'2")
3	Tail swing radius	3080 mm (10'1")
4	Length to center of rollers	3990 mm (13'1")
5	Track length	4860 mm (15'11")
6	Ground clearance	490 mm (1'7")
7	Track gauge	2590 mm (8'6")
8	Transport width	
	800 mm (32") shoes (standard)	3390 mm (11'1")
	700 mm (28") shoes (optional)	3290 mm (10'10")
	600 mm (24") shoes (optional)	3190 mm (10'6")
9	Cab height	3040 mm (10'0")
10	Counterweight clearance	1110 mm (3'8")



## Dimensions

All dimensions are approximate.

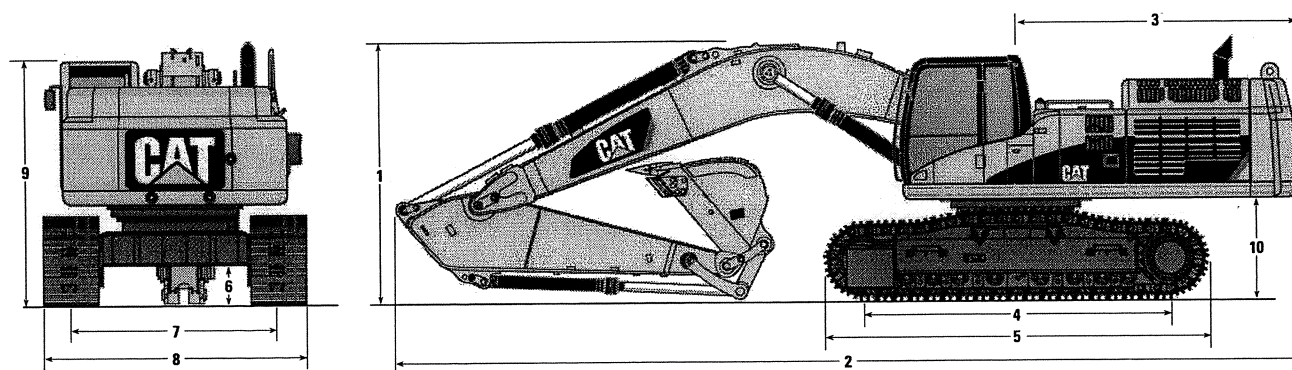


Boom	Long Reach Boom 7.4 m (24'3")		HD Reach Boom 6.9 m (22'8")		Mass Boom 6.55 m (21'6")	
Stick	R4.3TB (14'1")	R3.9TB (12'10")	R3.9TB (12'10")	R3.35TB (11'0")	M3.0UB (9'10")	M2.5UB (8'2")
<b>1 Shipping Height</b>						
Fixed Gauge Undercarriage	3680 mm (12'1")	3570 mm (11'8")	3660 mm (12'0")	3690 mm (12'1")	4020 mm (13'2")	3960 mm (13'0")
Variable Gauge Undercarriage	3630 mm (11'11")	3550 mm (11'7")	3640 mm (11'11")	3720 mm (12'2")	4050 mm (13'3")	4000 mm (13'2")
<b>2 Shipping Length</b>						
Fixed Gauge Undercarriage	12 450 mm (40'10")	12 430 mm (40'9")	11 950 mm (39'2")	11 940 mm (39'2")	11 640 mm (38'2")	11 710 mm (38'5")
Variable Gauge Undercarriage	12 400 mm (40'8")	12 370 mm (40'7")	11 910 mm (39'1")	11 910 mm (39'1")	11 620 mm (38'1")	11 680 mm (38'4")
<b>3 Tail Swing Radius</b>	3770 mm (12'4")	3770 mm (12'4")	3770 mm (12'4")	3770 mm (12'4")	3770 mm (12'4")	3770 mm (12'4")
<b>Undercarriage</b>	<b>Fixed Gauge</b>		<b>Variable Gauge</b>			
<b>4 Length to Center of Rollers</b>	4360 mm (14'4")		4340 mm (14'3")			
<b>5 Track Length</b>	5360 mm (17'7")		5340 mm (17'6")			
<b>6 Ground Clearance</b>	510 mm (1'8")		740 mm (2'5")			
<b>7 Track Gauge</b>						
Retracted (Transport) Position	2740 mm (9'0")		2640 mm (8'8")			
Extended (Working) Position	2740 mm (9'0")		2890 mm (9'6")			
<b>8 Track Width*</b>						
Retracted (Transport) Position	3640 mm (11'11")		3540 mm (11'7")			
Extended (Working) Position	3640 mm (11'11")		3790 mm (12'5")			
<b>9 Cab Height</b>	3210 mm (10'6")		3360 mm (11'0")			
<b>10 Counterweight Height (to bottom)</b>	1320 mm (4'4")		1470 mm (4'10")			

\* Track width shown is for 900 mm (36") track shoes. Subtract 150 mm (6") for 750 mm (30") track shoes.

## Dimensions

All dimensions are approximate.

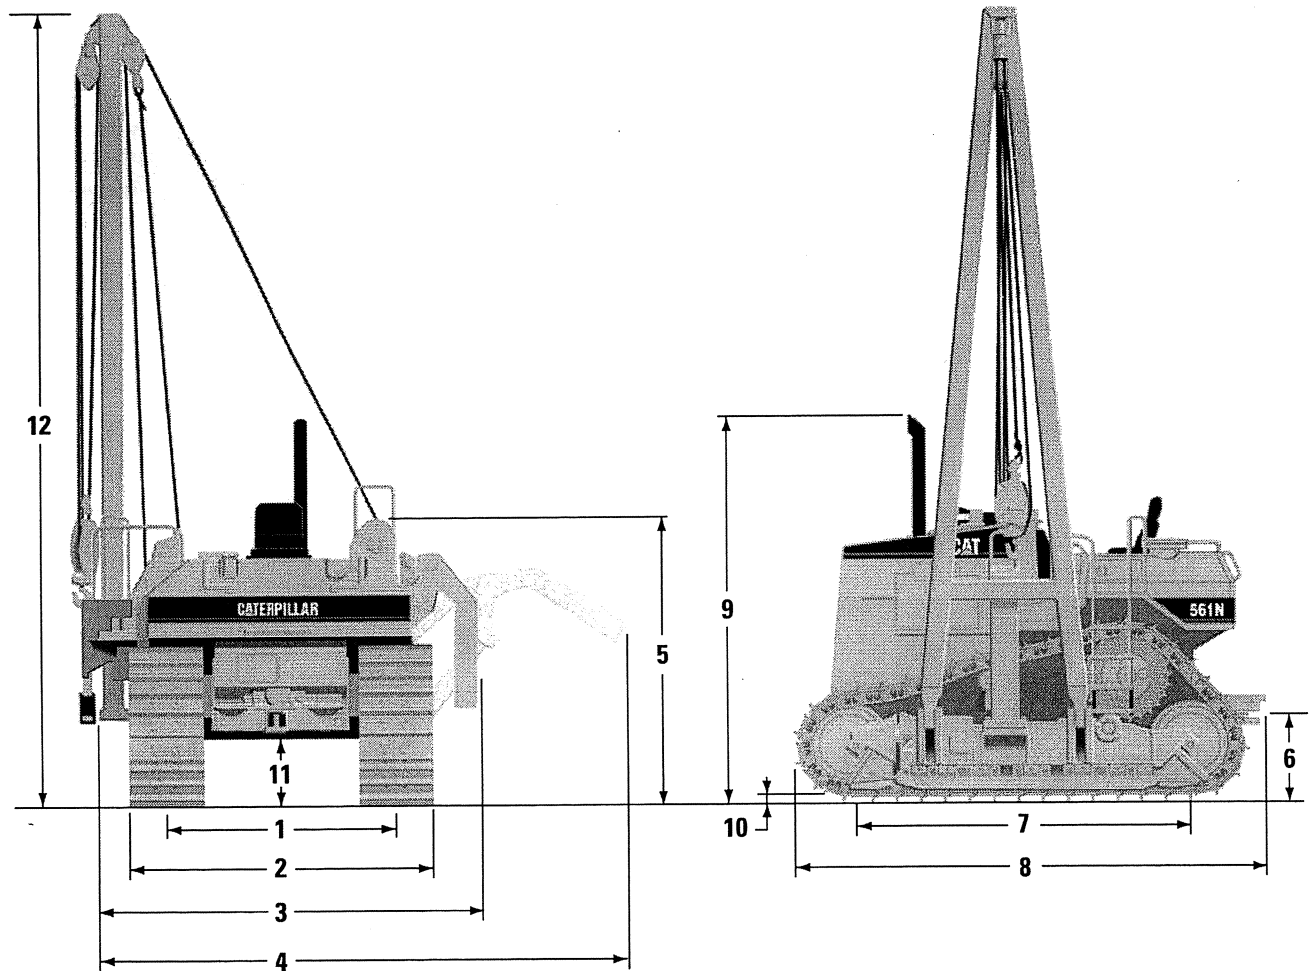

1	Track Gauge	2000 mm	79 in
2	Width of Tractor - Standard Shoes	2560 mm	101 in
3	Width of Tractor - Counterweight/Boom Removed	2983.5 mm	117.5 in
4	Width of Tractor - Counterweight Extended	4463 mm	176 in
5	Machine Height - Tip of Grouser to Top of Winch	2519 mm	99 in
6	Drawbar Height (Center of Clevis)	537.5 mm	21 in

7	Length of Track on Ground	2604 mm	103 in
8	Operating Length (with Drawbar)	3708.5 mm	146 in
9	Height to Top of Stack	3041.4 mm	119 in
10	Grouser Height	47 mm	1.9 in
11	Ground Clearance (SAE J1234)	432.5 mm	17 in
12	Boom Height - Tip of Grouser at SAE 4 ft (1.22 m) Overhang	6361.7 mm	251 in